

25G-8TPS2-A2-OB

4K HDBaseT Output Board with Digital Audio

Part No: 9123 0046

Features

- HDMI 1.4 compliant video input over HDBaseT with a resolution of up to 4K / UHD (30Hz RGB or YCbCr 4:4:4, 60Hz YCbCr 4:2:0)
- Pass-through of 4:2:0 3840x2160@60 Hz video input
- Support for HDMI 1.4 embedded uncompressed LPCM audio or compressed high bitrate audio (LPCM, AC-3, MPEG1 Layer 1, MPEG1 Layer2, MPEG1 Layer 3, MPEG2, AAC, DTS, ATRAC, Dolby Digital+, DTS-HD, Dolby Digital TrueHD, DST, and WMA Pro, Dolby Digital EX, Dolby Digital Surround EX)
- De-embedding of IEC-60958-1 (only stereo LPCM), and IEC-61937 (only AC-3, Dolby Digital Plus, Dolby Digital EX, Dolby Digital Surround EX, DTS, DTS ES)
- Video test pattern generation
- Cable length and link quality estimation
- Frame detector functionality with frame rate, color space, pixel clock rate, and active and total area detection
- HDCP 1.4 support
- Deep color support for up to 36 bpp
- Automatic Ethernet only mode support when an Ethernet only device is connected
- Extension for up to 170 meters over CAT6a depending on the video clock used

Featuring eight HDBaseT 1.x output ports, the board is compatible with the full range of Lightware TPS extenders and HDBaseT compliant 3rd party transmitters. The HDBaseT technology provides a transparent medium for all video, audio, data and control signals in line with the 25G multilayer architecture and allows for a cost effective extension solution for up to 170 meters.

The A2 add-on has bi-directional configurable S/PDIF connectors. The 2-channel LPCM and various IEC 61937 audio formats from the add-on can be embedded either to the output HDMI signal or to the Return Audio Layer. Moreover, such audio either from the HDMI signal or the Forward Audio Layer can be routed to the add-on output.

Supported Media Layers:

- Video layer with embedded audio
- Forward Audio Layer
- Return Audio Layer
- Ethernet layer
- USB KVM layer
- Infra layer
- Consumer Electronics Control layer
- RS-232 & RS-422 control layer




25G-8TPS2-A2-OB

Specifications

HDCP compliance:	1.4
HDBaseT compliance:	1.4
Max resolutions:	4K / UHD (30Hz RGB or YCbCr 4:4:4, 60Hz YCbCr 4:2:0), 1080p@60Hz, 720p/1080i@120Hz
Supported audio formats:	HDMI audio according to the Audio switching matrix section
3D signal compatibility:	Frame packing, side-by-side, top bottom
Input cable equalization:	Up to 170 meters according to the maximum cable lengths section
HDBaseT connectors:	8 x RJ45
Audio connectors:	8 x S/PDIF

Available Video Patterns:

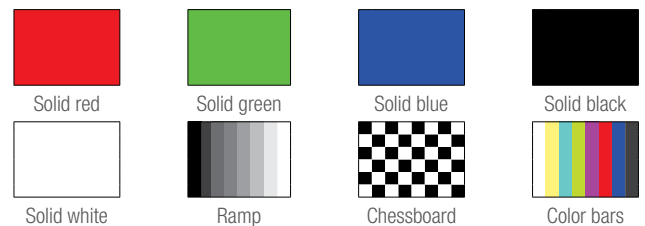

Test Pattern Generator Video Formats:

480p, 576p, 720p, 1080p, 1080p deep color

Audio Switching Matrix:

		Output		
		HDMI	Digital Audio	Return Audio Layer
Input	HDMI Embedded Audio Over HDBaseT	✓ (All HDMI audio formats)	✓ (2-channel LPCM and various IEC 61937 formats*)	✓ (2-channel LPCM and various IEC 61937 formats*)
	Forward Audio Layer	✓ (2-channel LPCM and various IEC 61937 formats*)	✓ (2-channel LPCM and various IEC 61937 formats*)	✓ (2-channel LPCM and various IEC 61937 formats*)
	Digital Audio	✓	✗	✓
	Audio Test Generator	✓	✓	✓

Note: Simultaneous embedding to and de-embedding from HDMI is not supported.
* Dolby Digital, Dolby Digital EX, Dolby Digital Plus, Dolby Digital Surround EX, DTS, DTS ES

Physical Interfaces:

- 8 RJ45 connectors
- S/PDIF connectors
- Link Status LED per connector
- LED tower (Service, Control, Live and Power indicator)

Max Cable Lengths Supported by the Available Firmware Versions

Resolution	Pixel Clock Rate	Cable Lengths (Auto / LR Link Mode)		
		CAT5e AWG24	CAT7 AWG26	CAT7 AWG23
1024x768@60Hz	65 MHz	100 m / 130 m*	90 m / 120 m*	120 m / 170 m*
1280x720p@60Hz	73.8 MHz	100 m / 130 m*	90 m / 120 m*	120 m / 170 m*
1920x1080p@60Hz / 24bpp	148.5 MHz	100 m / 130 m*	90 m / 120 m*	120 m / 170 m*
1920x1200@60Hz	152.9 MHz	100 m / NA*	90 m / NA*	120 m / NA*
1600x1200@60Hz	162 MHz	100 m / NA*	90 m / NA*	120 m / NA*
1920x1080@60Hz / 36bpp	223 MHz	70 m / NA*	70 m / NA*	100 m / NA*
3840x2160@30Hz UHD	297 MHz	70 m / NA*	70 m / NA*	100 m / NA*
4096x2160@30Hz 4K	297 MHz	70 m / NA*	70 m / NA*	100 m / NA*

* with Long reach operation mode which supports pixel clock frequencies up to 148,5 MHz.