

## 25G-8TPS2-A3-IB

### 4K HDBaseT Input Board with Analog Audio

Part No: 9123 0069

#### Features

- HDMI 1.4 compliant video input over HDBaseT with a resolution of up to 4K / UHD (30Hz RGB 4:4:4, 60Hz YCbCr 4:2:0),
- Pass through of 4:2:0 3840x2160@60 Hz video input
- Support for HDMI 1.4 embedded uncompressed LPCM audio or compressed high bitrate audio (LPCM, AC 3, MPEG1 Layer 1, MPEG1 Layer2, MPEG1 Layer 3, MPEG2, AAC, DTS, ATRAC, Dolby Digital+, DTS HD, Dolby Digital TrueHD, DST, and WMA Pro, Dolby Digital EX, Dolby Digital Surround EX)
- De embedding of IEC 60958 1 (only stereo LPCM), and IEC 61937 (only AC 3, Dolby Digital Plus, Dolby Digital EX, Dolby Digital Surround EX, DTS, DTS ES)
- Video test pattern generation
- Cable length and link quality estimation
- Frame detector functionality with frame rate, color space, pixel clock rate, and active and total area detection
- HDCP 1.x support
- Deep color support for up to 36 bpp
- Automatic Ethernet only mode support when an Ethernet only device is connected
- Extension for up to 170 meters over CAT7e depending on the video clock used

Featuring eight HDBaseT 1.x input ports, the board is compatible with the full range of Lightware TPS extenders and HDBaseT compliant third party transmitters. The HDBaseT technology provides a transparent medium for all video, audio, data and control signals in line with the 25G multilayer architecture and allows for a cost effective extension solution for up to 170 meters.

The A3 add on has bi-directional and configurable Phoenix connectors. IEC 60958 1 audio embedded in the HDMI input or from the Return Audio Layer can be converted to an analog signal and switched to the Phoenix output. Moreover, the digitized analog audio through the analog input connector can be embedded in the HDMI signal or can be routed to the Forward Audio Layer.

#### Supported Media Layers:

- Video layer with embedded audio
- Forward Audio Layer
- Return Audio Layer
- Ethernet layer
- USB KVM layer
- Infra layer
- Consumer Electronics Control layer
- RS-232 & RS-422 control layer




25G-8TPS2-A3-IB

#### Specifications

HDCP compliance:	1.x
HDBaseT compliance	1.x
Max resolutions:	4K / UHD (30Hz RGB 4:4:4, 60Hz YCbCr 4:2:0), 1080p@60Hz, 720p/1080i@120Hz
Supported audio formats:	HDMI audio according to the Audio switching matrix section
3D signal compatibility:	Frame packing, side-by-side, top bottom
Input cable equalization:	Up to 170 meters according to the maximum cable lengths section
HDBaseT connectors:	8 x RJ45
Audio connectors:	8 x 5-pole Phoenix type

#### Available Video Patterns:

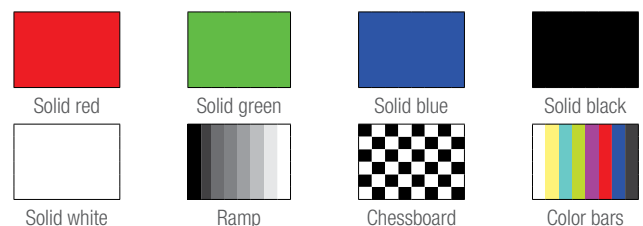

#### Test Pattern Generator Video Formats:

480p, 576p, 720p, 1080p, 1080p deep color

#### Audio Switching Matrix:

		Output		
		HDMI	Analog Audio	Forward Audio Layer
Input	HDMI Embedded Audio Over HDBaseT	✓ (All HDMI audio formats)	✓ (IEC 60958-1)*	✓ (IEC 60958-1 and IEC 61937)*
	Return Audio Layer	✓ (IEC 60958-1 and IEC 61937)*	✓ (IEC 60958-1)*	✓ (IEC 60958-1 and IEC 61937)*
	Analog Audio	✓	✗	✓
	Audio Test Generator	✓	✓	✓

Note: Simultaneous embedding to and de-embedding from HDMI is not supported.  
\*For details see the feature list

#### Physical Interfaces:

- 8 RJ45 connectors
- 8 Phoenix type connectors
- Link Status LED per connector
- LED tower (Service, Control, Live and Power indicator)

## Max Cable Lengths Supported by the Available Firmware Versions

Resolution	Pixel Clock Rate	Cable Lengths (Auto / LR Link Mode)	
		CAT5e	CATe
1024x768@60Hz	65 MHz	100 m / 160 m*	120 m / 170 m*
1280x720p@60Hz	73,84 MHz	100 m / 160 m*	120 m / 170 m*
1920x1080i@60Hz	74.25 MHz	100 m / 160 m*	120 m / 170 m*
1280x1024@60Hz	108 MHz	100 m / 160 m*	120 m / 170 m*
1920x1080p@60Hz	148,5 MHz	100 m / 150 m*	120 m / 170 m*
1920x1200@60Hz	152,9 MHz	100 m / NA*	120 m / NA*
1600x1200@60Hz	162 MHz	100 m / NA*	120 m / NA*
2560x1600@60Hz	268,3MHz	70 m / NA*	80 m / NA*
1920x1080@120Hz	297 MHz	70 m / NA*	80 m / NA*
3840x2160@30Hz UHD	297 MHz	70 m / NA*	80 m / NA*
4096x2160@30Hz 4K	297 MHz	70 m / NA*	80 m / NA*

\* with Long reach operation mode which supports pixel clock frequencies up to 148,5 MHz.