

25G-8DVID2-A3-IB

4K DVI-D Input Board with Analog Audio

Part No: 9122 0047

Features

- HDMI 1.4, DVI and HDCP 1.4 compliant
- Bi-directional balanced or unbalanced analog stereo audio ports with 5 pole Phoenix connector
- Resolutions up to 4K / UHD (30Hz RGB or YCbCr 4:4:4, 60Hz YCbCr 4:2:0), 1080p@60Hz, 720p/1080i@120Hz
- 3D signal support
- 36-bit Deep Color support
- Static EDID emulation with EDIDs from the Advanced EDID Management system
- Available video test patterns
- Pass-through of HDMI 1.4 embedded uncompressed LPCM audio and compressed audio (AAC, ATRAC, DTS, DTS ES, DTS-HD, Dolby Digital, Dolby Digital EX, Dolby Digital Plus, Dolby Digital Surround EX, Dolby Digital TrueHD, DST, MPEG1 Layer 1, MPEG1 Layer2, MPEG1 Layer 3, MPEG2, WMA Pro)
- Embedding or de-embedding of two-channel LPCM, Dolby Digital, Dolby Digital EX, Dolby Digital Plus, Dolby Digital Surround EX, DTS, DTS ES*
- Pixel Accurate Reclocking
- 30m input cable equalization at 1080p60Hz on all inputs

*See the audio switching matrix for more details.

25G-8DVID2-A3-IB provides fully transparent HDMI 1.4 connectivity to the latest high-end digital sources including 3D functions between the endpoints. Supports resolution up to 4096x2160@30Hz in 4:4:4 mode or 3840x2160@60Hz in 4:2:0 mode. The new 300MHz board supports the latest 3D formats as well as HD multichannel audio. 25G 8DVID2-A3 IB has eight DVI D connectors with an additional 5 pole analog Phoenix connector for each DVI-D port. Each input has 30m input cable equalization and individual EDID Management.

25G-8DVID2-A3-IB handles embedded audio in the HDMI signal (with capabilities of routing to the 25G audio layers). The analog audio input signal can be embedded into the 25G Video layer or sent to the Forward Audio Layer.

The A3 add-on has bi-directional configurable Phoenix connectors. 2-channel LPCM audio embedded in the HDMI input or from the Return Audio Layer can be converted to an analog signal and switched to the Phoenix output. Moreover, the digitized analog audio through the analog input connector can be embedded to the HDMI signal or can be routed to the Forward Audio Layer.

The audio options of the DVI-D input board are software-configurable on a per-port basis.

Supported Media Layers:

- Video layer with embedded audio
- Forward Audio Layer
- Return Audio Layer




25G-8DVID2-A3-IB

Specifications

HDCP compliance:	Yes
Max resolutions:	4K / UHD (30Hz RGB or YCbCr 4:4:4, 60Hz YCbCr 4:2:0), 1080p@60Hz, 720p/1080i@120Hz
Supported audio formats:	HDMI audio according to the Audio switching matrix section
3D signal compatibility:	Frame packing, side-by-side, top bottom
Input cable equalization:	30 m for 1080p60Hz, 14 m for 4k@30Hz (tested with 22AWG cable)
Power consumption:	21.3 W (max.)
Heat dissipation:	73 BTU/h (max.)
Video connectors:	8 x DVI-D
Audio connectors:	8 x 5-pole Phoenix type

Available Video Patterns:

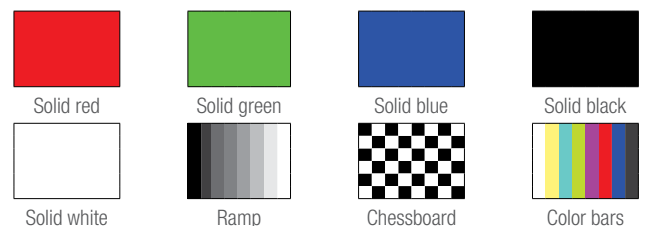

Test Pattern Generator Video Formats:
480p, 576p, 720p, 1080p, 1080p deep color

Audio Switching Matrix:

		Output		
		HDMI	Analog Audio	Forward Audio Layer
Input	HDMI	(All HDMI audio formats) ✓	(2-channel LPCM) ✓	(2-channel LPCM and various IEC 61937 formats*) ✓
	Analog Audio	✓	✗	✓
	Return Audio Layer	(2-channel LPCM and various IEC 61937 formats*) ✓	(2-channel LPCM) ✓	(2-channel LPCM and various IEC 61937 formats*) ✓
	Audio Test Generator	✓	✓	✓

Note: Simultaneous embedding to and de-embedding from HDMI is not supported.
* Dolby Digital, Dolby Digital EX, Dolby Digital Plus, Dolby Digital Surround EX, DTS, DTS ES